

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : A61B 17/34	A1	(11) International Publication Number: WO 00/54675 (43) International Publication Date: 21 September 2000 (21.09.00)
<p>(21) International Application Number: PCT/IE00/00032</p> <p>(22) International Filing Date: 20 March 2000 (20.03.00)</p> <p>(30) Priority Data: S990219 18 March 1999 (18.03.99) IE</p> <p>(71) Applicant (for all designated States except US): GAYA LIMITED [IE/IE]; 2-3 Sandyford Village, Sandyford, Dublin 18 (IE).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): CALDWELL, Martin [IE/IE]; 37 Mount Pleasant Square, Ranelagh, Dublin 6 (IE). MUNTNER, Mike [IE/IE]; 19 Doonamana Road, Dun Laoire, County Dublin (IE).</p> <p>(74) Agent: MACLACHLAN & DONALDSON: 47 Merrion Square, Dublin 2 (IE).</p>	<p>(81) Designated States: CA, CN, JP, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</p>	

(54) Title: A SURGICAL ACCESS DEVICE

(57) Abstract

Surgical device (1) is for use in minimally invasive surgery using an inflated body cavity (2) accessible to a surgeon through an access port defined by a sleeve (4) passing through an incision in a patient's abdominal wall (3). The device is held in position by a distal ring (5) and a proximal ring (6). An incision engaging bladder (10) provides a first seal for engaging and retracting the incision when inflated. A second seal is provided by a self engaging bladder (12) for sealing the sleeve (4).

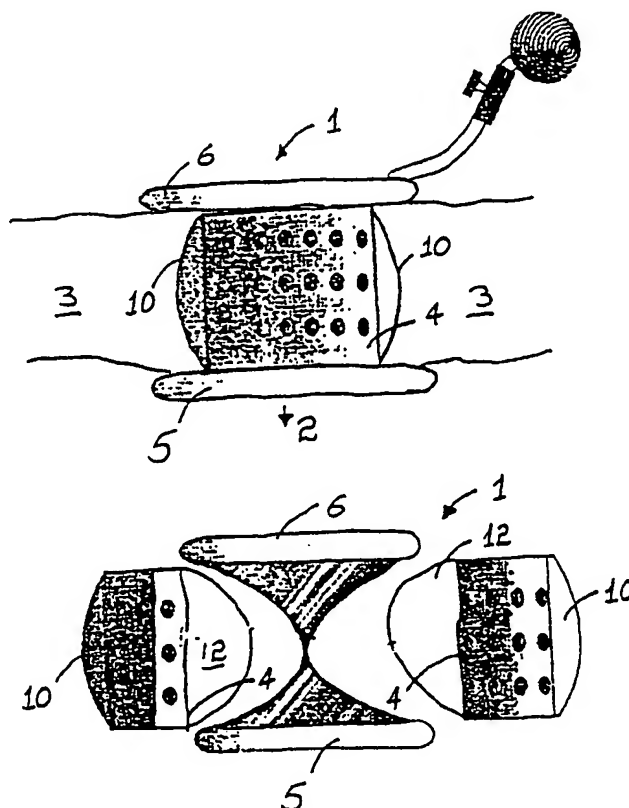

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

A SURGICAL ACCESS DEVICE

The present invention relates to a surgical device for use in minimally invasive surgery of the type using patient pneumoperitoneum and an access port.

5

Minimally invasive surgery of this type is carried out having introduced gas into a patient's body cavity through an incision and sealed the incision with an access port. The access port enables laproscopic and hand or instrument assisted surgery to be performed.

10 A sleeve forming such a port is shown in WO-A-95/07056 entitled "Apparatus for use in surgery". The access port sleeve shown is used to create a controlled pressurized environment within the sleeve while allowing a surgeon's arm to pass through the sleeve. During surgery, gas is pumped into the patient's body cavity where the surgery is to be performed and the sleeve prevents gas escaping while allowing the surgeon to operate
15 using minimally invasive surgery techniques. The application shows a sleeve having a flange at a distal end provided with adhesive for adhering the device to a patient's body or alternatively a mounting ring to surround the incision in a patient's body. While providing a suitable apparatus for performing such surgery the device described suffers from the principle disadvantage that in use, the sleeve protrudes upwardly from the patient and may
20 interfere with the activities of the surgery team. Additionally, the sleeve must be sealed against the surgeon's upper forearm by clamping the device to the arm sufficiently tightly to avoid gas leak around the area of the seal. This presents the surgeon with a problem both in sealing the sleeve and in subsequent mobility.

25 A further problem associated with the use of sleeves of the kind described is that a phenomenon known as "tenting" may occur. "Tenting" means that when the sleeve is adhered to the patient's skin or to a surgical drape and gas is induced into the patients abdominal cavity, there is a tendency for the sleeve to fill with gas and to pull away from the patient.

30

There is therefore a need for a surgical device, which will overcome the aforementioned problems.

Accordingly, there is provided a surgical device for use in minimally invasive surgery of the type using an inflated body cavity accessible to a surgeon through an access port, defined by the device, surrounding an incision in a patients body, the device having: -

5

body cavity engagement means for insertion into the incision to locate the device in position;

fixing means for attaching the device to a patients skin;

10

a sleeve connected between the body cavity engagement means and the fixing means defining an access port; and

15

sealing means, operating on the sleeve to prevent substantial leakage of gas from the body cavity on inflation when in an inoperative position and formed to mould a substantial portion of a surgeon's hand or surgical instrument on insertion in an operating position.

Ideally, the sleeve is provided by a perforated wall defining a substantially cylindrical tube.

20

Preferably, the body cavity engagement means is provided by a distal ring formed for insertion into the incision.

25

Preferably, the fixing means is provided by a proximal ring for engaging with a patient's skin.

In one arrangement, the proximal ring has an associated connector ring for receiving additional seals or medical instruments.

30

In a preferred arrangement, the sealing means is provided by an inflatable first seal for engaging and retracting the incision and a second inflatable seal for sealing the lumen of the tube or sleeve bore.

Ideally, the first seal is provided by an inflatable bladder extending outwardly from the sleeve on inflation to form a seal with the incision.

- 5 Preferably, the second seal is provided by an inflatable bladder extending inwardly from the tube or sleeve on inflation to prevent excessive loss of gas through the access port.

In a particularly preferred arrangement, the second seal is operatively connected and mounted within the first seal.

10

The invention will now be described more particularly with reference to the accompanying drawings, which show, by way of example only, an embodiment of a surgical device in accordance with the invention, in which:-

- 15 Fig. 1 is a front view of a surgical device in accordance with the invention; and

Fig. 2 is an exploded view of the surgical device of Fig. 1.

- Referring to the drawings, there is illustrated a surgical device according to the invention, indicated generally by the reference numeral 1. The surgical device 1 is formed for use in minimally invasive surgery of the type using an inflated body cavity indicated generally by the reference numeral 2. The cavity 2 is accessible to a surgeon through an access port, defined by a sleeve 4, passing through an incision in a patient's abdominal wall 3. The sleeve 4 is provided in this case by a perforated wall defining a cylindrical tube

25

- In more detail, the device 1 has a body cavity engagement means provided by a distal ring 5 for insertion into the incision to locate the device 1 in position. The device 1 is held in position on the patient's skin outside the body by a fixing means provided in this case by a proximal ring 6. The distal ring 5 and proximal ring 6 ensure that the device 1 is securely fixed in position, both rings 5,6 surround the incision and the sleeve 4 passes through the incision connecting the rings.
- 30

The proximal ring 6 may have a connector ring (not shown) for receiving additional seals to prevent loss of pressure from the cavity 2. The connector ring may also be used for holding or guiding medical instruments into position over, through or in the incision.

- 5 Sealing means is provided to prevent undue loss of gas from the inflated body cavity 2 by a two part inflatable seal. An incision-engaging bladder 10 provides a first seal for engaging and retracting the incision when inflated. A second seal is provided by a self-engaging bladder 12 mounted within the sleeve 4 for sealing the sleeve 4 when similarly inflated. The sleeve 4 separates the incision-engaging bladder 10 and the self-engaging bladder 12.
- 10 The self-engaging bladder 12 surrounds the internal surface of the sleeve 4 and the external surface of the sleeve 4 is in turn surrounded by the incision-engaging bladder 10 thereby providing a compact unit, which is easy to operate.

- In use, an incision is made in the abdominal wall 3 and the distal ring 5 passed through the incision into the cavity 2. The distal ring 5 is moved when in the cavity 2 so that the ring 5 surrounds the incision. The proximal ring 6 is then attached to the patients skin to fix the device 1 in position with the sleeve 4 being connected between the proximal ring 6 and the distal ring 5 and passing between the portions of the abdominal wall 3 exposed by the incision. The incision-engaging bladder 10 and the self-engaging bladder 12 both
- 20 surrounding the sleeve 4 are also in position passing through the abdominal wall. A hand operated bellows 11 can then pumped to inflate both the incision-engaging bladder 10 and the self-engaging bladder 12. The incision-engaging bladder 10 expands outwardly from the external wall of the sleeve 4 to press against the abdominal wall exposed by the incision to prevent loss of gas from the cavity 2. The self-engaging bladder 12 expands
- 25 inwardly from the internal wall of the sleeve 4 to close the sleeve 4 against itself thereby preventing loss of gas through the sleeve 4.

- When a surgeon wishes to gain access to the cavity 2 a hand or instrument is passed down through the sleeve 4. The inward pressure of the self-engaging bladder 12 ensures that the
- 30 sleeve is only opened sufficiently to allow the inserted object to pass but prevents loss of pressure from the body cavity. As the object is removed, the same pressure re-seals the sleeve 4 as described above. As a hand or instrument is passed down through the sleeve 4,

air or gas is expelled from the bladder 12 through perforations in the sleeve 4. The expelled air or gas is forced into the bladder 10 which expands and further retracts the incision, enhancing the ease of access through the sleeve 4 and incision.

- 5 It will be noted that while a bellows or inflating device is described, with air or gas communicating between the incision-engaging bladder and the sleeve-engaging bladder it is anticipated that separate inflation devices for independent control may be used.

10 It will of course be understood that the invention is not limited to the specific details described herein, which are given by way of example only, and that various modifications and alterations are possible within the scope of the invention.

CLAIMS:

1. A surgical device for use in minimally invasive surgery of the type using an inflated body cavity accessible to a surgeon through an access port, defined by the device,
5 surrounding an incision in a patients body, the device having: -

body cavity engagement means for insertion into the incision to locate the device in position;

- 10 fixing means for attaching the device to a patients skin;

a sleeve connected between the body cavity engagement means and the fixing means defining an access port; and

- 15 sealing means, operating on the sleeve to prevent substantial leakage of gas from the body cavity on inflation when in an inoperative position and formed to mould a substantial portion of a surgeon's hand or surgical instrument on insertion in an operating position.

- 20 2. A surgical device as claimed in Claim 1, in which the sleeve is provided by a perforated wall defining a substantially cylindrical tube.



3. A surgical device as claimed in Claim 1 or Claim 2, in which the body cavity engagement means is provided by a distal ring formed for insertion into the incision.

25

4. A surgical device as claimed in any one of the preceding claims, in which the fixing means is provided by a proximal ring for engaging with a patient's skin.

5. A surgical device as claimed in Claim 4, in which the proximal ring has an associated
30 connector ring for receiving additional seals or medical instruments.

6. A surgical device as claimed in any one of the preceding claims in which the sealing means is provided by an inflatable first seal for engaging and retracting the incision and a second inflatable seal for sealing the lumen of the tube or sleeve bore.
- 5 7. A surgical device as claimed in Claim 6, in which the first seal is provided by an inflatable bladder extending outwardly from the sleeve on inflation to form a seal with the incision.
8. A surgical device as claimed in Claim 6 or Claim 7, in which the second seal is
10 provided by an inflatable bladder extending inwardly from the tube or sleeve on inflation to prevent excessive loss of gas through the access port.
9. A surgical device as claimed in Claim 8, in which the second seal is operatively connected and mounted within the first seal.

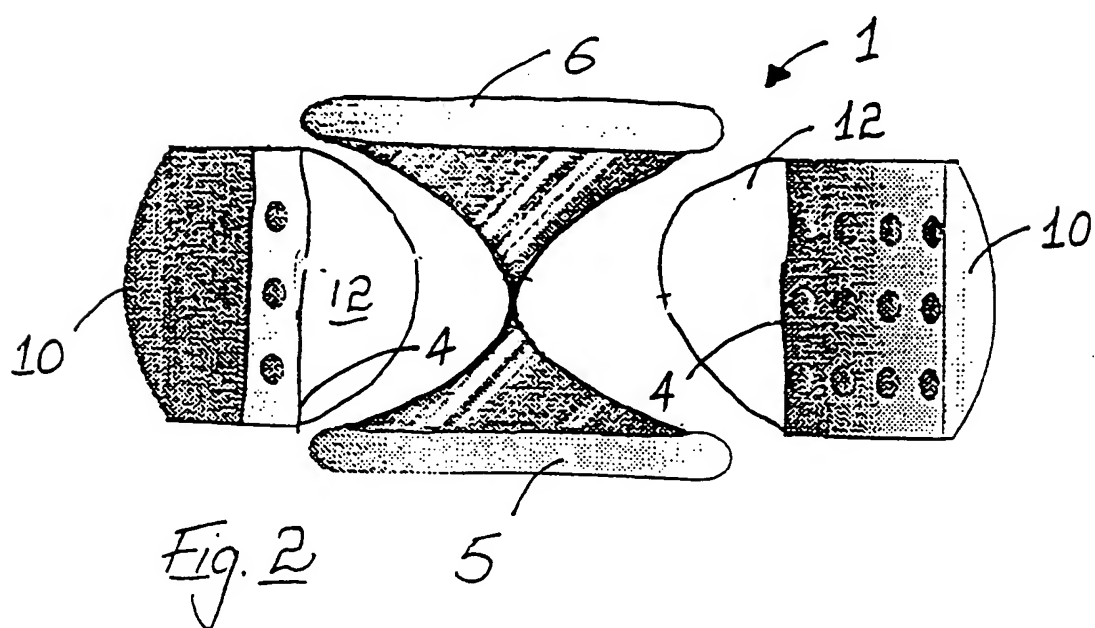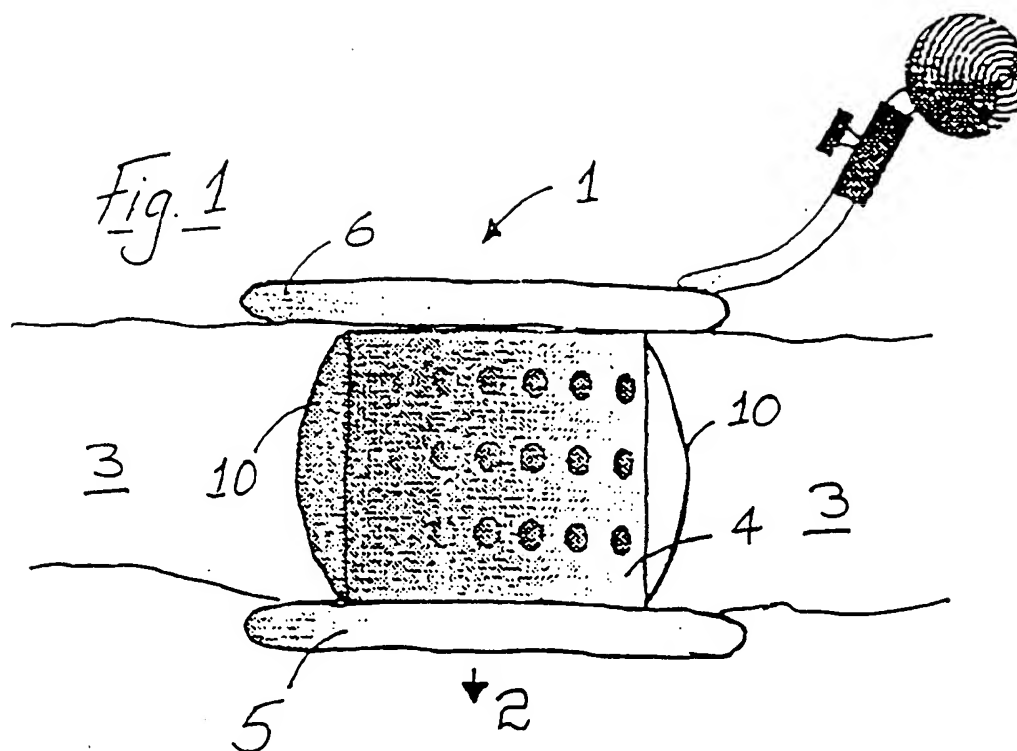

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IE 00/00032

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>WO 95 07056 A (ENCORET) 16 March 1995 (1995-03-16) cited in the application abstract; figure 9 -----</p>	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IE 00/00032

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9636283 A	21-11-1996	US 5634937 A US 5964781 A	03-06-1997 12-10-1999
US 5366478 A	22-11-1994	NONE	
GB 2275420 A	31-08-1994	NONE	
US 5741298 A	21-04-1998	US 5947922 A	07-09-1999
WO 9507056 A	16-03-1995	AT 188364 T AU 696289 B AU 7507494 A CA 2171177 A DE 69422530 D EP 0776180 A EP 0834279 A EP 0888755 A EP 0887047 A EP 0887048 A ES 2142404 T JP 9502624 T	15-01-2000 03-09-1998 27-03-1995 16-03-1995 10-02-2000 04-06-1997 08-04-1998 07-01-1999 30-12-1998 30-12-1998 16-04-2000 18-03-1997